

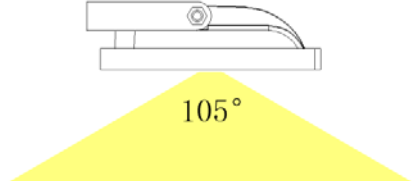

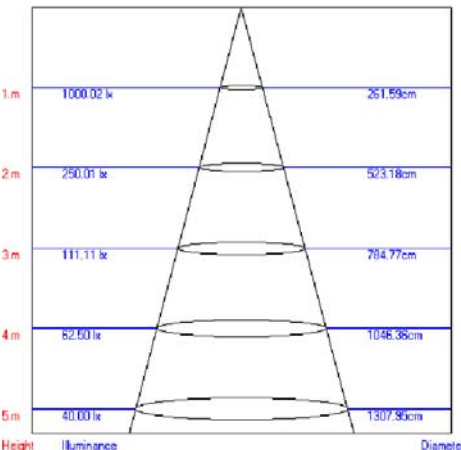
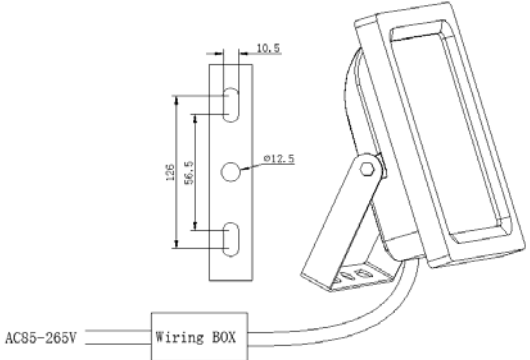


information for catalogue and product box

NO	Needed information	Sample																		
1	Product High quality Pictures																			
2	Front view & Side view Line Drawing Image																			
4	Beam Angle																			
5	Light Distribution Curve																			
6	Lux Distance Curve	 <table border="1"> <thead> <tr> <th>Height</th> <th>Illuminance</th> <th>Diameter</th> </tr> </thead> <tbody> <tr> <td>1m</td> <td>1000.02 lx</td> <td>261.59cm</td> </tr> <tr> <td>2m</td> <td>250.01 lx</td> <td>523.18cm</td> </tr> <tr> <td>3m</td> <td>111.11 lx</td> <td>784.77cm</td> </tr> <tr> <td>4m</td> <td>62.50 lx</td> <td>1046.36cm</td> </tr> <tr> <td>5m</td> <td>40.00 lx</td> <td>1307.95cm</td> </tr> </tbody> </table> <p>Beam Angle: 105.20 Deg</p>	Height	Illuminance	Diameter	1m	1000.02 lx	261.59cm	2m	250.01 lx	523.18cm	3m	111.11 lx	784.77cm	4m	62.50 lx	1046.36cm	5m	40.00 lx	1307.95cm
Height	Illuminance	Diameter																		
1m	1000.02 lx	261.59cm																		
2m	250.01 lx	523.18cm																		
3m	111.11 lx	784.77cm																		
4m	62.50 lx	1046.36cm																		
5m	40.00 lx	1307.95cm																		

7	Installation Guide	
8	Product catalogue and parameters	<p>Input Voltage: 85-265V Power: 30W CRI: Ra>70 Beam Angle: 105° Luminous flux: 2850lm Color Temperature: 3000K/6500K Power Factor: >0.95 Protection Level: IP65 Life Time : 25000H</p>
9	Electrical & Photometrical test report	

Information for assembly and Repairing	
NO	Needed information
1	Product BOM
2	Driver Schematic
3	Assembly full Guide